



# Chime Check Sheet

Date: \_\_\_/\_\_\_/\_\_\_



TOTAL PIPE ORGAN RESOURCES

P.O. Box 8325 \* Erie, PA 16505-0325  
(814) 835-2244 Voice \* (814) 838-0349 Fax

- Quote Only
- Order

Customer: \_\_\_\_\_

Order Number: \_\_\_\_\_

Project Name: \_\_\_\_\_

### Style of Chimes

- Deagan - 1-1/4" Seamless Tubular Brass Bell Metal
- Mayland - 1-1/4" Solid Alloy Aluminum Bar

### How Many Notes?

- 21 Note, A-22 to F-43 Chromatic
- 25 Note, G-20 to G-44 Chromatic

### Chime Rail Layout?

- "L"
- "R"
- "W"
- "V"
- "D"

### Do you need a relay or keyboard?

- Electro Mechanical Relay for Note Action
- Electro Mechanical Relay 5 Position for Volume Control
- Under Key Contact Rail
- Chime Keyboard with Volume Control Switch
  
- Solid State Relay (for use ONLY with Passive Damper Systems)


### Wall Brackets?

- Standard Wall Brackets
- Wall Brackets Extended for Canopy Use

### Would you like a Canopy?

- Standard Canopy with Nameplate
- Custom Canopy Finished to Sample

### Chime Rail Layout Options

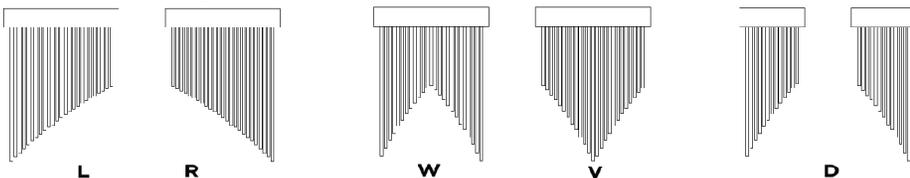

### Deagan Finish

- Satin with Clear Lacquer (Default)
- Polish and Clear Lacquer

### Mayland Finish

- Gold Lacquer (Default)
- Aluminum Lacquer
- Polish and Clear Lacquer

### I would like this to be a complete package!

#### Unwired Package, Electro Mechanical Relay

##### Includes:

- Chime Set with Cords
- Action Rail
- 5 Point Volume Control

- Multi-Tap Transformer
- Bridge Rectifier
- Chime Installation Instructions

#### Unwired Package, Solid State Relay

##### Includes:

- Chime Set with Cords
- Action Rail
- 5 Point Volume Control

- Single-Tap Transformer
- Chime Installation Instructions

#### Wired Package, Electro Mechanical Relay

##### Includes:

- Chime Set with Cords
- Action Rail
- 5 Point Volume Control
- Multi-Tap Transformer

- Bridge Rectifier
- 50 Ft. 25 Conductor, Stranded Chime Cable
- 10 Ft. Stranded Volume Control Cable
- Chime Installation Instructions

#### Wired Package, Solid State Relay

##### Includes:

- Chime Set with Cords
- Action Rail
- 5 Point Volume Control
- Single Tap Transformer

- 50 Ft. 25 Conductor, Solid #24 PVC Cable
- 10 Ft. Solid Volume Control Cable
- Chime Installation Instructions

#### I would like more cable than what comes in the standard package,

I need: \_\_\_\_\_ Ft. to the Relay, and \_\_\_\_\_ Ft. to the Volume Control

## Chime Construction

**Tuning** Tuning on all Chimes is A=440 Hz Standard. Special pitch available upon request.

### Deagan Chime Sets

**21 Note** 68" H x 44" W x 8" D includes canopy

**25 Note** 72" H x 51" W x 8" D includes canopy

### Mayland Chime Sets

**21 Note** 71" H x 44" W x 8" D includes canopy

**25 Note** 76" H x 51" W x 8" D includes canopy

### Chime Tubes

Chime Tube sets are available, as are individual tubes. Deagan chime tubes are 1-1/4" Diameter Satin and lacquered brass. Hole for hanging cord is 1" from top of tube. Mayland chime tubes are 1-1/4" solid aluminum bar that are lacquered brilliant gold. Hole for hanging cord is 2-1/2" from top of tube. Chime sets are tuned, matched, and voiced as sets. Furnished with chime hangers installed.

### Some ways to Identify the Class of Chime you have

**Deagan Class A, 20 Note** 1-9/16" to 1-1/16" OD

**Deagan Class A, 21 Note** 1-9/16" to 1-1/16" OD

**Deagan Class A, 25 Note** 1-3/4" to 1" OD

**Deagan Class K, 20 Note** 1-1/2" OD

**Deagan Class K, 21 Note** 1-1/2" OD

**Deagan Class K, 25 Note** 1-1/2" OD

**Deagan Class D, 20 Note** 1-3/4" to 1-3/16" OD

**Deagan Class D, 21 Note** 1-3/4" to 1-1/8" OD


**Deagan Class D, 25 Note** 1-13/16" to 1-1/8" OD

**DEAGAN CLASS M** All 1-1/4" Tubes

**Deagan Class R** All 1" Tubes

- > OSI Chime Replacements are only suitable for Class M Chimes
- > OSI Chime Rail Replacements Available for All Classes
- > Only Passive Damper Actions Available

### Mayland and Deagan Striker Assembly

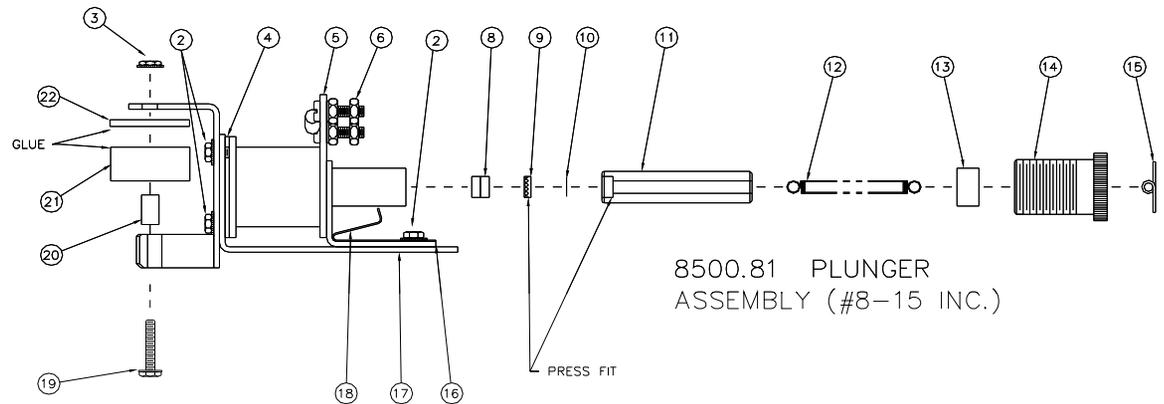

## Signature

Date \_\_\_\_\_

In order to release this information for production scheduling, a customer's signature and date **MUST** be present. By signing this document you are authorizing OSI to begin work on this project and verifying all information to be accurate. If additional notes are required, please provide on a separate sheet.