



**ORGAN  
SUPPLY  
INDUSTRIES**

P.O. Box 8325 \* Erie, PA 16505-0325  
(814) 835-2244 Voice \* (814) 838-0349 Fax

# Manual Keyboard Check Sheet

Customer: \_\_\_\_\_

Date: \_\_\_/\_\_\_/\_\_\_

Order #: \_\_\_\_\_ Requested Delivery: \_\_\_/\_\_\_/\_\_\_

**NOTE: Please make an effort to give us a reasonable, delivery date. We will make every effort to meet or exceed that date. Our currently delivery for standard keyboards is 60 days and special covering keyboards 90 days. Complete details and deposit must accompany the order to be placed at these dates.**

✓ **Size:** \_\_\_\_\_ Manuals Mounted \_\_\_\_\_ Notes

✓ **Natural Key Covering Options:**

- White Synthetic (Standard)
- Crème Synthetic
- White Satin Synthetic
- Crème Satin Synthetic
- Wood, Species: \_\_\_\_\_
- Bone
- Ivory

✓ **Sharp Key Covering Options:**

- Synthetic (Standard)
- Satin Synthetic
- Ebony
- Wood, Species: \_\_\_\_\_

✓ **Springing Options:**

- Rear Coil Spring (Standard), for use with Tracker Touch
  - Install Tracker Touch Option.  
(Adjusted to 3-3/4 oz. at Top and 2-1/2 oz. At Bottom)
- Front Compass Spring, Tracker Touch Not Available

✓ **Key Cheek Options:**

- Wood**
- Mahogany (Standard)
  - Walnut
  - Other, Species: \_\_\_\_\_

**Shape:**

- Standard
- Square
- 70 Degrees
- EMS
- Other: Profile Attached

**Top Rail:**

- None
- Style #1
- Style #2

**Incline:**

- Flat (Standard)
- Inclined: Details Attached
- Drop Sill Console: Details Attached

**Width:**

- 1-1/4" (Standard) 36-1/8" W. O.A.
- Special Width: \_\_\_\_\_

**Finishing:**

- Unfinished (Standard): Piston Bushings will be provided separately, NOT INSTALLED
- Finished to Customer's Sample  
Date Provided: \_\_\_/\_\_\_/\_\_\_



Style #1 Top Rail  
Stopkey Consoles



Style #2 Top Rail  
Tilting Tablet Consoles

✓ **Keyboard Slides & Guides:**

- Provide Slides and Guides (Allows keyboard to be pulled out for servicing)
- Provide 4" Extension on bottom keyboard  
(For Drawknob Consoles and Stopkey Consoles without Steps)



**Key Contacts:**

- 4-Wire Contact Blocks and Silver Tipped Wipers Installed Each Manual (Standard)
- Other: Please Specify: \_\_\_\_\_



**Wiring:**

- Unwired
- Wire Out Contact Rails \_\_\_\_ ft. to Spreader or \_\_\_\_\_




**Pistons:**

- |  |   |  |  |
|--|---|--|--|
| <input type="checkbox"/> White (Default) | <input type="checkbox"/> 5/8" Ø (Default) | <input type="checkbox"/> EMS Style (Default) | <input type="checkbox"/> Black Velveteen Bushing (Default) |
| <input type="checkbox"/> Ivory           | <input type="checkbox"/> 9/16" Ø          | <input type="checkbox"/> 2 Contact           | <input type="checkbox"/> Maroon Velveteen Bushing          |
|  | <input type="checkbox"/> Special: _____   | <input type="checkbox"/> Microswitch         | <input type="checkbox"/> Brown Velveteen Bushing           |
|  |   | <input type="checkbox"/> Other: _____        |  |



**Piston Layout: Total Number of Pistons:** \_\_\_\_\_ Please Name or Number each piston where it should appear:

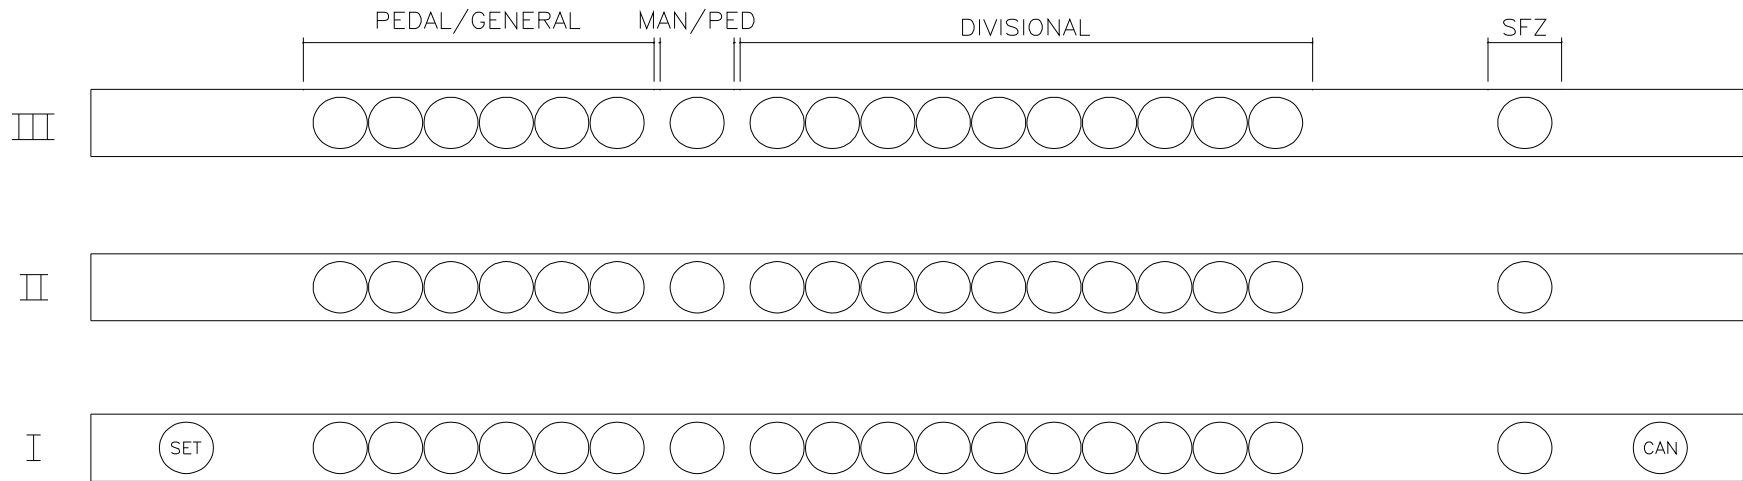

NOTE: PISTONS SHOWN LARGER THAN SCALE      LOCATED UNDER MIDDLE C

**Special Instructions:**

**Approved By:** \_\_\_\_\_ Signature Required for Production Release

**Date:** \_\_\_\_\_