

NOTE: Please make an effort to give us a reasonable delivery date. We will make every effort to meet or exceed that date. If the date is not included, the order will go in the next schedule opening.

Customer: _____
 Date: _____
 OSI Order Number: _____
 Requested Delivery Date: _____

STOP NAME & PITCH: _____ **SCALE:** _____
 # _____ -- _____ Wood Pipes # _____ -- _____ Metal Pipes – (specify **S.M.** or **C.M.**) **TOTAL PIPES:** _____

WOOD SPECIES: Poplar (Standard) Other: _____

FOOT LOCATIONS: OSI Standard 8' (Centered in Block, **WITHOUT CAP**)
 OSI Standard 16' (Centered in Block, Left to Right, **Front to Back per Chart**)
 Centered in block, **WITHOUT CAP** Centered in block, **WITH CAP**
 Other: _____

Standard Organ Supply Industries foot location for 16' stopped wood pipes.
 Dimensions given are from the back of the pipe. Foot is centered side to side.

Note	Scale #1 & 2	Scale #3 & 4	Scale #5	Toe ID #1 & 2	Toe ID #3 & 4	Toe ID #5
#1-4	4-1/2"	4"	3-1/2"	2"	1-3/4"	1-1/2"
#5-6	4"	3-1/2"	3-1/2"	1-3/4"	1-1/2"	1-1/2"
#7-8	4"	3-1/2"	3"	1-3/4"	1-1/2"	1-1/4"
#9-12	3-1/2"	3"	3"	1-1/2"	1-1/4"	1-1/4"

PIPE FEET: 6" Pipe feet will be furnished with shellac finish unless otherwise specified below
 Special foot lengths (list on reverse side) Special Sizes or With Gates (list on reverse side)
 Special Finish: _____ Unfinished
 Do Not Bore Pipes; Do Not Supply Feet

MOUTH STYLE: Standard Splayed Inverted Other: _____

NOTE: All stopped wood pipes have flat or level blocks.
 All open wood pipes have a sunken or stepped block. Special blocks available.

STOPPERS: Standard Straight Dowel Pierced Straight Dowel (Rohrflöte)

FINISH: Clear Lacquer Shellac Brown Stain Finished to Sample

VOICING: Unvoiced Voiced W.P. _____
NOTE: All Pipes Voiced at A=440 hz at 70°, Unless otherwise specified in Special Instructions


CHEST TYPE: Pouch Slider Electro-Mechanical

ELEVATION: _____ feet, (If over 1000 feet above sea level)

VOICING INSTRUCTIONS:
 Room Size, Acoustics, Pipe Location (Chamber, Encased, Exposed), Builder, Stop List, Metal Thickness Cut-Ups, Nicking, Open Toe, Timbre, etc.

MITERING INSTRUCTIONS:

Miter Over: Front Back Left Right
 Tuner Slot Location: Back Front

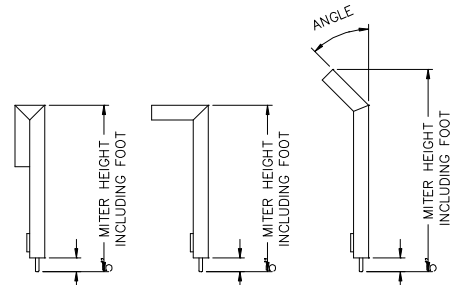

Approved by: _____ Date: _____